

## MPO-LC 转接设备

### (10 路 40G/100G MPO 转 40 路双 LC)

#### 产品


10 路 MPO/UPC(40G/100G)转 40 路双 LC/UPC (10G/25G) 1U 机箱

#### 产品参数


参数	单模		多模	
	MPO/APC	LC/UPC	MPO/UPC	LC/UPC
IL (插损)	≤0.35dB	≤0.15dB	≤0.35dB	≤0.15dB
RL (回损)	≥45 dB	≥50 dB	≥25 dB	≥35 dB
光纤类型	SMF-28e		OM4	
插拔次数	500 次			
抗拉强度	66N			
使用温度	-20 ~+70℃			
存储温度	-40 ~+80℃			
机箱尺寸	483 (L) x 44(H)x230(W)mm 19 吋-1U-深度 230mm			

注：插损和回损指设备端，不含外部跳纤。

#### 产品面板图





MPO 转 LC 单模



MPO 转 LC 多模

#### 内部连接图



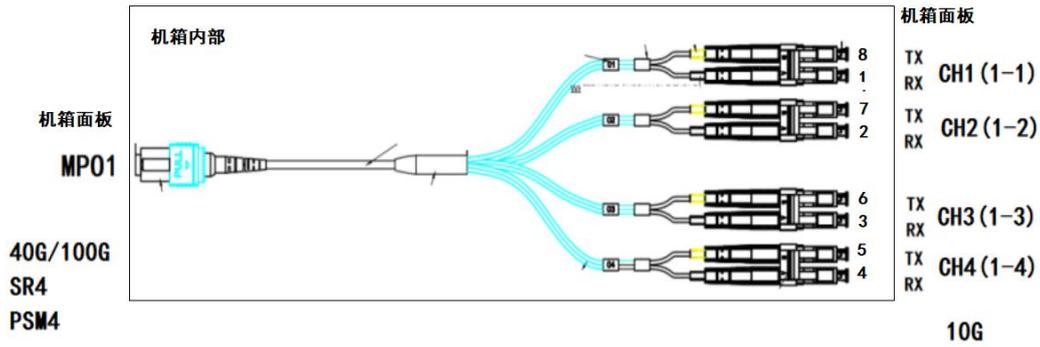


MPO 和 LC 对应关系

MPO 接口	LC 接口 (双联)
MPO1	1-1
	1-2
	1-3
	1-4
MPO2	2-1
	2-2
	2-3
	2-4
MPO3	3-1
	3-2
	3-3
	3-4
MPO4	4-1
	4-2
	4-3
	4-4
MPO5	5-1
	5-2
	5-3
	5-4
MPO6	6-1
	6-2
	6-3
	6-4
MPO7	7-1
	7-2
	7-3
	7-4
MPO8	8-1
	8-2

MPO9	8-3
	8-4
	9-1
	9-2
MPO10	9-3
	9-4
	10-1
	10-2
	10-3
	10-4

设备尺寸

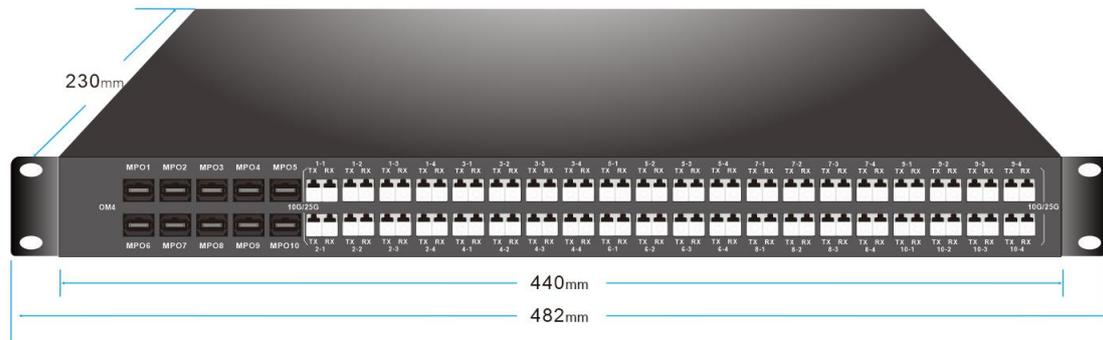

订购信息

产品型号	产品规格
RD-10MPO12-40LC-SM	MPO to dual LC device, 10 X 40G/ 100G MPO/UPC to 40 X 10G/25G dual LC/UPC, SM,1U Rack
RD-10MPO12-40LC-MM	MPO to dual LC device, 10 X 40G/ 100G MPO/UPC to 40 X 10G/25G dual LC/UPC, MM,1U Rack